



Product Specification

AU OPTRONICS CORPORATION

G270QAN02.0

(v) Preliminary Specifications

() Final Specifications

Module	27 Inch Color TFT-LCD
Model Name	G270QAN02.0




<table><tr><td>Customer</td><td>Date</td></tr><tr><td>_____</td><td>_____</td></tr><tr><td>Checked & Approved by</td><td>Date</td></tr><tr><td>_____</td><td>_____</td></tr></table>	Customer	Date	_____	_____	Checked & Approved by	Date	_____	_____	<table><tr><td>Approved by</td><td>Date</td></tr><tr><td><u>Jerry Chen</u></td><td><u>Apr. 17, 2019</u></td></tr><tr><td>Prepared by</td><td>Date</td></tr><tr><td><u>Audrey HC Lin</u></td><td><u>Apr. 17, 2019</u></td></tr></table>	Approved by	Date	<u>Jerry Chen</u>	<u>Apr. 17, 2019</u>	Prepared by	Date	<u>Audrey HC Lin</u>	<u>Apr. 17, 2019</u>
Customer	Date																
_____	_____																
Checked & Approved by	Date																
_____	_____																
Approved by	Date																
<u>Jerry Chen</u>	<u>Apr. 17, 2019</u>																
Prepared by	Date																
<u>Audrey HC Lin</u>	<u>Apr. 17, 2019</u>																
Customer's sign back page	General Display Business Division / AU Optronics corporation																



Contents

1. Operating Precautions	5
2. General Description	6
2.1 Display Characteristics	6
2.2 Optical Characteristics	7
3. Functional Block Diagram	10
4. Absolute Maximum Ratings	11
4.1 Absolute Ratings of TFT LCD Module	11
4.2 Absolute Ratings of Environment	11
5. Electrical Characteristics	12
5.1 TFT LCD Module	12
5.2 Backlight Unit	15
6. Signal Characteristic	17
6.1 Pixel Format Image	17
6.2 LVDS Data Format	18
6.3 Signal Description	19
6.4 Interface Timing	22
6.5 Power ON/OFF Sequence	24
7. Reliability Test Criteria	25
8. Mechanical Characteristics	26
8.1 LCM Outline Dimension	26
9. Label and Packaging	28
9.1 Shipping Label (on the rear side of TFT-LCD display)	28
9.2 Carton Package	28
10 Safety	29
10.1 Sharp Edge Requirements	29
10.2 Materials	29
10.3 Capacitors	29
10.4 National Test Lab Requirement	29

Record of Revision

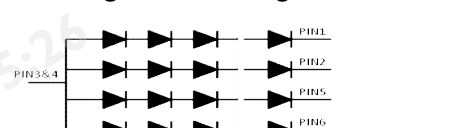Version	Date (yyyy.mm.dd)	Page	Old description	New Description																																															
00	2019.01.25	-	First edition																																																
01	2019.03.25	5		Add TCO 7.0 Compliance																																															
		6		Add Min luminance <table><tr><th>Item¹⁾</th><th>Unit²⁾</th><th>Conditions³⁾</th><th>Min.⁴⁾</th><th>Typ.⁵⁾</th><th>Max.⁶⁾</th><th>Note⁷⁾</th></tr><tr><td>White Luminance¹⁾</td><td>cd/m²</td><td>ILED=82mA(center point)²⁾</td><td>280³⁾</td><td>350⁴⁾</td><td></td><td></td></tr></table> Add Color / Chromaticity Coordinates: <table><tr><td rowspan="6">Color / Chromaticity Coordinates x, y (CIE 1931)¹⁾</td><td>Red x²⁾</td><td>0.627</td><td>0.657</td><td>0.687</td></tr><tr><td>Red y²⁾</td><td>0.301</td><td>0.331</td><td>0.361</td></tr><tr><td>Green x²⁾</td><td>0.274</td><td>0.304</td><td>0.334</td></tr><tr><td>Green y²⁾</td><td>0.588</td><td>0.618</td><td>0.648</td></tr><tr><td>Blue x²⁾</td><td>0.118</td><td>0.148</td><td>0.178</td></tr><tr><td>Blue y²⁾</td><td>0.034</td><td>0.064</td><td>0.094</td></tr><tr><td>White x²⁾</td><td>0.283</td><td>0.313</td><td>0.343</td></tr><tr><td>White y²⁾</td><td>0.299</td><td>0.329</td><td>0.359</td></tr></table>	Item ¹⁾	Unit ²⁾	Conditions ³⁾	Min. ⁴⁾	Typ. ⁵⁾	Max. ⁶⁾	Note ⁷⁾	White Luminance ¹⁾	cd/m ²	ILED=82mA(center point) ²⁾	280 ³⁾	350 ⁴⁾			Color / Chromaticity Coordinates x, y (CIE 1931) ¹⁾	Red x ²⁾	0.627	0.657	0.687	Red y ²⁾	0.301	0.331	0.361	Green x ²⁾	0.274	0.304	0.334	Green y ²⁾	0.588	0.618	0.648	Blue x ²⁾	0.118	0.148	0.178	Blue y ²⁾	0.034	0.064	0.094	White x ²⁾	0.283	0.313	0.343	White y ²⁾	0.299	0.329	0.359
		Item ¹⁾	Unit ²⁾	Conditions ³⁾	Min. ⁴⁾	Typ. ⁵⁾	Max. ⁶⁾	Note ⁷⁾																																											
		White Luminance ¹⁾	cd/m ²	ILED=82mA(center point) ²⁾	280 ³⁾	350 ⁴⁾																																													
		Color / Chromaticity Coordinates x, y (CIE 1931) ¹⁾	Red x ²⁾	0.627	0.657	0.687																																													
Red y ²⁾	0.301		0.331	0.361																																															
Green x ²⁾	0.274		0.304	0.334																																															
Green y ²⁾	0.588		0.618	0.648																																															
Blue x ²⁾	0.118		0.148	0.178																																															
Blue y ²⁾	0.034		0.064	0.094																																															
White x ²⁾	0.283	0.313	0.343																																																
White y ²⁾	0.299	0.329	0.359																																																
14	Block diagram of Backlight unit – old 	Block diagram of Backlight unit - new  Add LED supply max volume: <table><tr><th>Symbol¹⁾</th><th>Parameter²⁾</th><th>Min.³⁾</th><th>Typ.⁴⁾</th><th>Max.⁵⁾</th><th>Unit⁶⁾</th><th>Remark⁷⁾</th></tr><tr><td>L₁</td><td>LED Supply Current</td><td>-</td><td>82</td><td>90</td><td>[mA]</td><td>Ta = 25°C, Note 2.</td></tr></table>	Symbol ¹⁾	Parameter ²⁾	Min. ³⁾	Typ. ⁴⁾	Max. ⁵⁾	Unit ⁶⁾	Remark ⁷⁾	L ₁	LED Supply Current	-	82	90	[mA]	Ta = 25°C, Note 2.																																			
Symbol ¹⁾	Parameter ²⁾	Min. ³⁾	Typ. ⁴⁾	Max. ⁵⁾	Unit ⁶⁾	Remark ⁷⁾																																													
L ₁	LED Supply Current	-	82	90	[mA]	Ta = 25°C, Note 2.																																													
17	Mating Connector (CNT2) - Old: <table><tr><td rowspan="2">Mating Connector (CNT2)</td><td>Manufacturer</td><td>JAE</td></tr><tr><td>Part Number</td><td>P1-NV40CL</td></tr></table>	Mating Connector (CNT2)	Manufacturer	JAE	Part Number	P1-NV40CL	Mating Connector (CNT2) - New: <table><tr><td rowspan="2">Mating Connector (CNT2)</td><td>Manufacturer</td><td>Starcom</td></tr><tr><td>Part Number</td><td>115H40</td></tr></table>	Mating Connector (CNT2)	Manufacturer	Starcom	Part Number	115H40																																							
Mating Connector (CNT2)	Manufacturer		JAE																																																
	Part Number	P1-NV40CL																																																	
Mating Connector (CNT2)	Manufacturer	Starcom																																																	
	Part Number	115H40																																																	
22	Update note of Power Sequence Timing – old: Note 3-5 : Recommend setting T5 = 0ms to avoid electronic noise when VDD is off. Note 3-6 : During T5 , please keep the level of input LVDS signals with Hi-Z state. Note 3-7 : Voltage of VDO must decay smoothly after power-off. (customer system decide this value)	Update note of Power Sequence Timing – New: Note 3-5 : Recommend setting T5 = 0ms to avoid electronic noise when VDD is off. Note 3-6 : Voltage of VDO must decay smoothly after power-off. (customer system decide this value)																																																	
02	2019.04.17	13 14		5.1.2 LVDS DC Signal Electrical Characteristics – Add Note: AC Characteristics <table><tr><th>Symbol¹⁾</th><th>Description²⁾</th><th>Min.³⁾</th><th>Max.⁴⁾</th><th>Unit⁵⁾</th><th>Remark⁶⁾</th></tr><tr><td>F_{clk}¹⁾</td><td>Maximum deviation of input clock frequency during Spread Spectrum²⁾</td><td>-</td><td>± 3%</td><td>%</td><td></td></tr><tr><td>F_{mod}¹⁾</td><td>Maximum modulation frequency of input clock during Spread Spectrum²⁾</td><td>-</td><td>200</td><td>KHz</td><td></td></tr></table> Add Note: Fclk- LVDS Clock Frequency. 	Symbol ¹⁾	Description ²⁾	Min. ³⁾	Max. ⁴⁾	Unit ⁵⁾	Remark ⁶⁾	F _{clk} ¹⁾	Maximum deviation of input clock frequency during Spread Spectrum ²⁾	-	± 3%	%		F _{mod} ¹⁾	Maximum modulation frequency of input clock during Spread Spectrum ²⁾	-	200	KHz																														
Symbol ¹⁾	Description ²⁾	Min. ³⁾	Max. ⁴⁾	Unit ⁵⁾	Remark ⁶⁾																																														
F _{clk} ¹⁾	Maximum deviation of input clock frequency during Spread Spectrum ²⁾	-	± 3%	%																																															
F _{mod} ¹⁾	Maximum modulation frequency of input clock during Spread Spectrum ²⁾	-	200	KHz																																															

Version	Date (yyyy.mm.dd)	Page	Old description	New Description																						
02	2019.04.17	16	5.2.3 Parameter guideline for LED LED characteristics Note 6. Note 6: Definition of life time: Brightness becomes to 50% of its original value. √ The minimum life time of LED unit is on the condition of $I_L = 100 \text{ mA}$ and $25 \pm 2^\circ\text{C}$ (Room Temperature). √	5.2.3 Parameter guideline for LED LED characteristics Note 6. Delete wrong description Note 6: Definition of life time: Brightness becomes to 50% of its original value. √																						
		19	Mating connector (CNT2) <table><tr><td>Mating Connector (CNT2) √</td><td>Manufacturer √</td><td>Starconn √</td></tr><tr><td></td><td>Part Number √</td><td>115H40 √</td></tr></table>	Mating Connector (CNT2) √	Manufacturer √	Starconn √		Part Number √	115H40 √	Add detailed model name of Mating connector (CNT2) <table><tr><td>Mating Connector (CNT2) √</td><td>Manufacturer √</td><td>Starconn √</td></tr><tr><td></td><td>Part Number √</td><td>115H40-000T2-A-00.B √</td></tr></table>	Mating Connector (CNT2) √	Manufacturer √	Starconn √		Part Number √	115H40-000T2-A-00.B √										
		Mating Connector (CNT2) √	Manufacturer √	Starconn √																						
			Part Number √	115H40 √																						
		Mating Connector (CNT2) √	Manufacturer √	Starconn √																						
	Part Number √	115H40-000T2-A-00.B √																								
26	Update outline drawing as Rev. X4 <table><tr><th>REV</th><th>ECN NO.</th><th>DESCRIPTION</th><th>SIGN</th><th>DATE</th></tr><tr><td>X1</td><td>-</td><td>ADD SECTION DRAWING</td><td>HELMS</td><td>2019/01/24</td></tr><tr><td>X2</td><td></td><td>ADD DIM. FOR PUNCH</td><td>HELMS</td><td>2019/01/31</td></tr><tr><td>X3</td><td></td><td>ADD DD TO AA DIM.</td><td>HELMS</td><td>2019/02/20</td></tr><tr><td>X4</td><td></td><td>CHANGE FRONT BEZEL DD</td><td>HELMS</td><td>2019/04/19</td></tr></table> Update packing: Add tape film around front bezel for helping polarizer protector film remove. 	REV	ECN NO.	DESCRIPTION	SIGN	DATE	X1	-	ADD SECTION DRAWING	HELMS	2019/01/24	X2		ADD DIM. FOR PUNCH	HELMS	2019/01/31	X3		ADD DD TO AA DIM.	HELMS	2019/02/20	X4		CHANGE FRONT BEZEL DD	HELMS	2019/04/19
REV		ECN NO.	DESCRIPTION	SIGN	DATE																					
X1		-	ADD SECTION DRAWING	HELMS	2019/01/24																					
X2		ADD DIM. FOR PUNCH	HELMS	2019/01/31																						
X3		ADD DD TO AA DIM.	HELMS	2019/02/20																						
X4		CHANGE FRONT BEZEL DD	HELMS	2019/04/19																						
27																										
28																										



1. Operating Precautions

- 1) Since front polarizer is easily damaged, please be cautious and not to scratch it.
- 2) Be sure to turn off power supply when inserting or disconnecting from input connector.
- 3) Wipe off water drop immediately. Long contact with water may cause discoloration or spots.
- 4) When the panel surface is soiled, wipe it with absorbent cotton or soft cloth.
- 5) Since the panel is made of glass, it may be broken or cracked if dropped or bumped on hard surface.
- 6) To avoid ESD (Electro Static Discharge) damage, be sure to ground yourself before handling TFT-LCD Module.
- 7) Do not open nor modify the module assembly.
- 8) Do not press the reflector sheet at the back of the module to any direction.
- 9) In case if a module has to be put back into the packing container slot after it was taken out from the container, do not press the center of the LED light bar edge. Instead, press at the far ends of the LED light bar edge softly. Otherwise the TFT Module may be damaged.
- 10) At the insertion or removal of the Signal Interface Connector, be sure not to rotate nor tilt the Interface Connector of the TFT Module.
- 11) TFT-LCD Module is not allowed to be twisted & bent even force is added on module in a very short time.
Please design your display product well to avoid external force applying to module by end-user directly.
- 12) Small amount of materials having no flammability grade is used in the LCD module. The LCD module should be supplied by power complied with requirements of Limited Power Source (IEC60950 or UL1950), or be applied exemption.
- 13) Severe temperature condition may result in different luminance, response time and lamp ignition voltage.
- 14) Continuous operating TFT-LCD display under low temperature environment may accelerate lamp exhaustion and reduce luminance dramatically.
- 15) The data on this specification sheet is applicable when LCD module is placed in landscape position.
- 16) Continuous displaying fixed pattern may induce image sticking. It's recommended to use screen saver or shuffle content periodically if fixed pattern is displayed on the screen.



2. General Description

This specification applies to the 27 inch wide color a-Si TFT-LCD Module. The screen format is intended to support the QHD (2560(H) x 1440(V) screen and 16.7M colors. All input signals are 4-channel LVDS and this module doesn't contain a driver board for backlight.

2.1 Display Characteristics

The following items are characteristics summary on the table under 25 °C condition:

Items	Unit	Specifications
Screen Diagonal	[inch]	27"
Active Area	[mm]	596.74(H) x 335.66(V)
Resolution		2560(x3) x 1440
Pixel Pitch	[mm]	0.2331 x 0.2331
Pixel Arrangement		R.G.B. Vertical Stripe
Display Mode		AHVA (Advanced Hyper-Viewing Angle), Normally Black
Nominal Input Voltage VDD	[Volt]	5
Power Consumption	[Watt]	LCD = 6W (Typ) Backlight unit = 16W (Typ) Total: 23W (Max)
Weight	[Grams]	3500g (Typ)
Physical Size	[mm]	606.44 (H) x 355.56 (V) x 13.09 (D) (Typ)
Electrical Interface		4 channel LVDS (8bits RGB data input)
Surface Treatment		Anti-Glare, 3H
Support Color		16.7 M Colors ,True 8 Bit (RGB)
Temperature Range Operating Storage (Non-Operating)	[°C] [°C]	0 to +50 -20 to +60
RoHS Compliance		RoHS Compliance
TCO Compliance		TCO 7.0

2.2 Optical Characteristics

The optical characteristics are measured under stable conditions at 25 °C (Room Temperature).


Test Condition:

- 1.Equipment setup:Please refer to Note 1
- 2.Panel Lighting: 30 minutes
- 3.VDD=5.0V , Fv=60Hz, Is = 82mA

Item	Unit	Conditions		Min.	Typ.	Max.	Note
White Luminance	cd/m ²	ILED=82mA(center point)		280	350		
Uniformity	%	9 points		75	80		2
Contrast Ratio	--			600	1000		3
Response Time	msec	Rising			8	16	4
		Falling			8	16	
		Rising + Falling			16	32	
Viewing Angle	degree	Horizontal CR >= 10	(Right)	75	89		5
			(Left)	75	89		
		Vertical CR >= 10	(Upper)	75	89		
			(Lower)	75	89		
Color / Chromaticity Coordinates (CIE 1931)	--	Red x		0.627	0.657	0.687	6
		Red y		0.301	0.331	0.361	
		Green x		0.274	0.304	0.334	
		Green y		0.588	0.618	0.648	
		Blue x		0.118	0.148	0.178	
		Blue y		0.034	0.064	0.094	
		White x		0.283	0.313	0.343	
		White y		0.299	0.329	0.359	
Color Gamut	%	SRGB			99		


Note 1: Measurement method

The LCD module should be stabilized at given temperature for 30 minutes to avoid abrupt temperature change during measuring (at surface 35±2). In order to stabilize the luminance, the measurement should be executed after lighting Backlight for 30 minutes in a stable, windless and dark room.

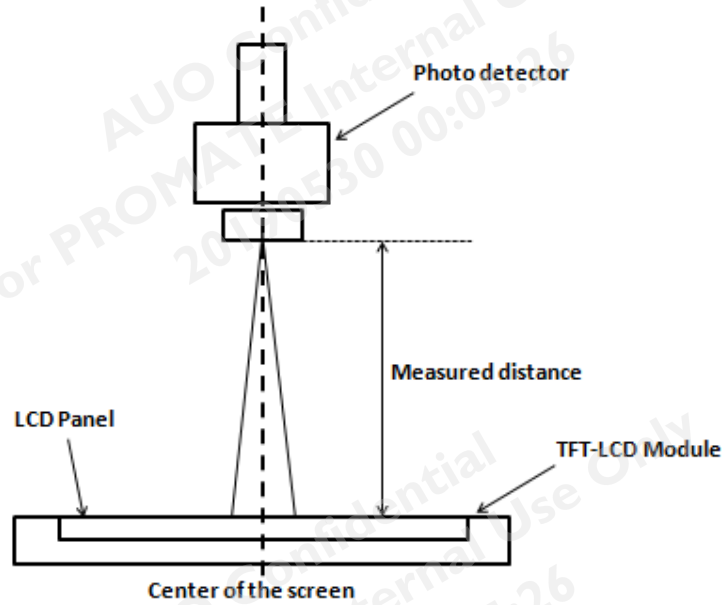

Note 2: Luminance uniformity of these 9 points is defined as below and measured by SR-3

The luminance uniformity of 9 points is defined by dividing the minimum luminance values by the maximum test point luminance

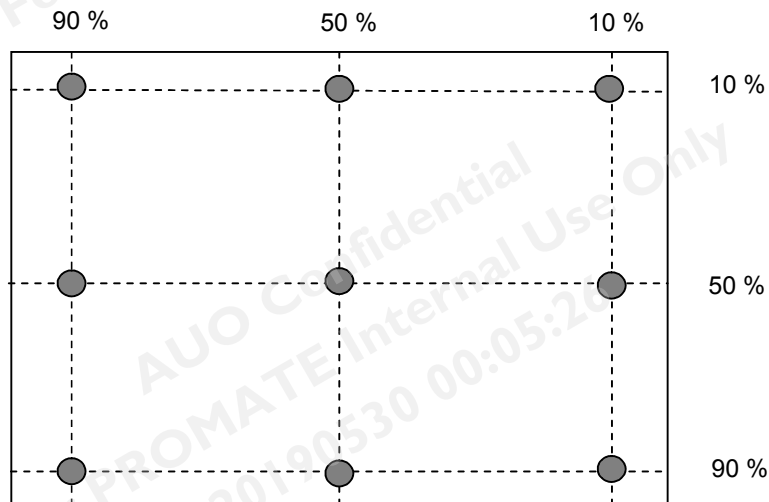

$$\text{Uniformity} = \frac{\text{Minimum Luminance in 9 points (1-9)}}{\text{Maximum Luminance in 9 Points (1-9)}}$$


Note 3: Contrast ratio is measured by SR-3

Definition of contrast ratio (CR):

$$\text{Contrast ratio (CR)} = \frac{\text{Brightness on the "White" state}}{\text{Brightness on the "Black" state}}$$


Note 4: Definition of Response time

The output signals of photo detector are measured when the input signals are changed from “White” to “Black” (falling time) and from “Black” to “White” (rising time), respectively. The response time interval is between 10% and 90% of amplitudes. Please refer to the figure as below.

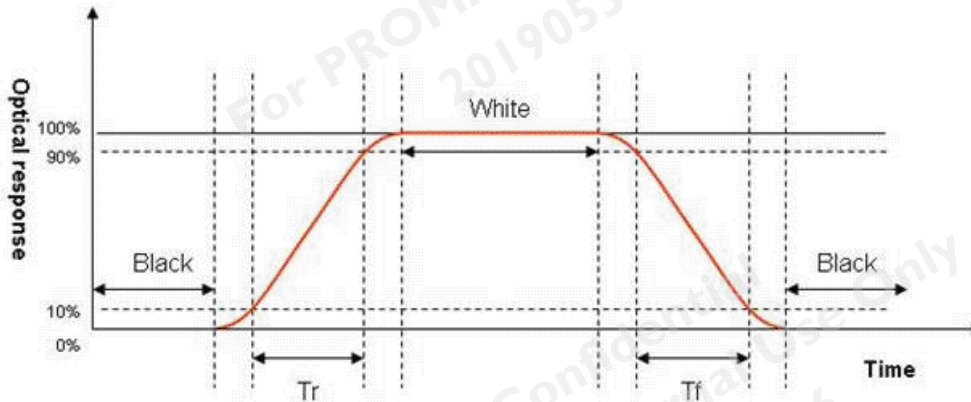

Note 5: Definition of viewing angle measured by ELDIM


Viewing angle is the measurement of contrast ratio ≥ 10 , at the screen center, over a 180° horizontal and 180° vertical range (off-normal viewing angles). The 180° viewing angle range is broken down as below: 90° (θ) horizontal left and right, and 90° (ϕ) vertical high (up) and low (down). The measurement direction is typically perpendicular to the display surface with the screen rotated to its center to develop the desired measurement viewing angle.

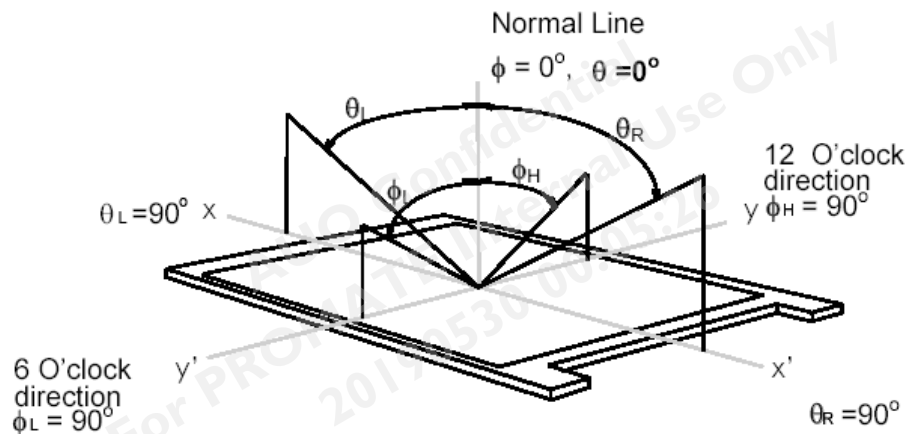

Note 6: Color chromaticity and coordinates (CIE) is measured by SR-3

3. Functional Block Diagram

The following diagram shows the functional block of the 27 inch color TFT/LCD module:

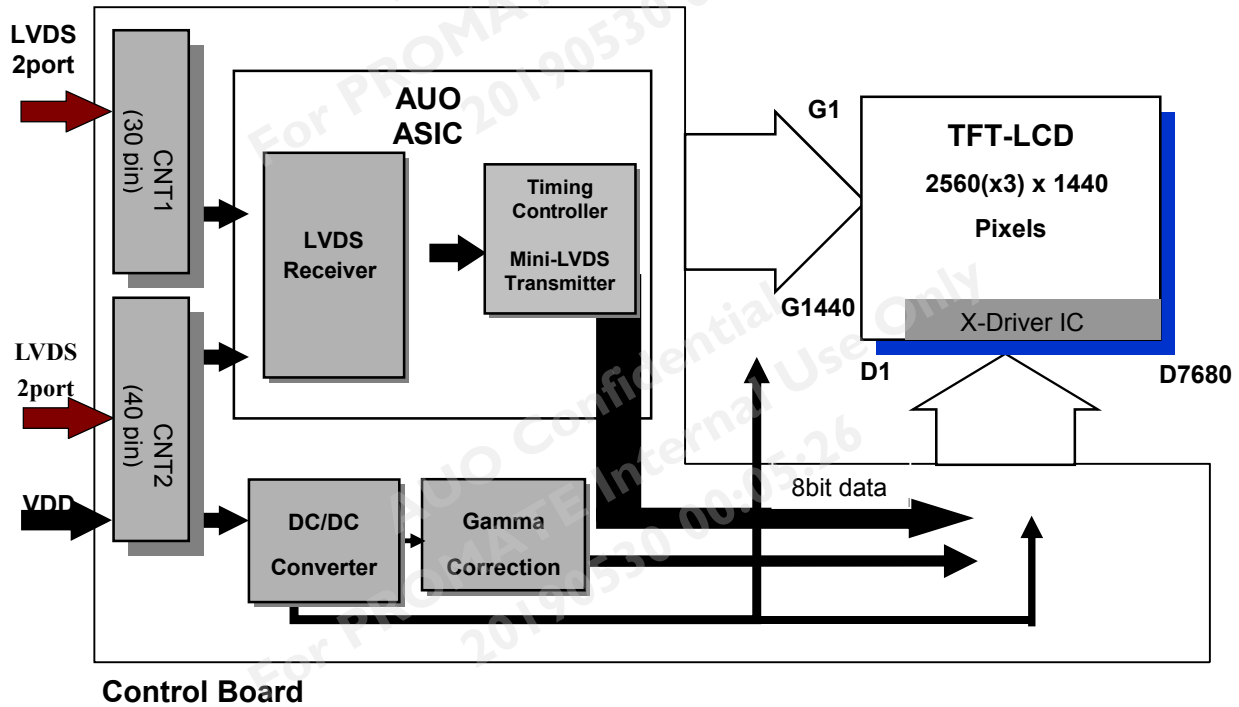

4. Absolute Maximum Ratings

4.1 Absolute Ratings of TFT LCD Module

Permanent damage may occur if exceeding the following maximum rating.

Symbol	Description	Min	Max	Unit	Remark
VDD	Power Supply Input Voltage	GND-0.3	6.0	[Volt]	Ta=25℃


4.2 Absolute Ratings of Environment

Item	Symbol	Min.	Max.	Unit	Conditions
Operating	TOP	0	+50	[°C]	Note
Operation Humidity	HOP	5	90	[%RH]	
Storage	TST	-20	+60	[°C]	
Storage Humidity	HST	5	90	[%RH]	

Note 1: Within Ta= 25℃

Note 2: Permanent damage to the device may occur if exceed maximum values

Note 3: For quality performance, please refer to AUO IIS (Incoming Inspection Standard).

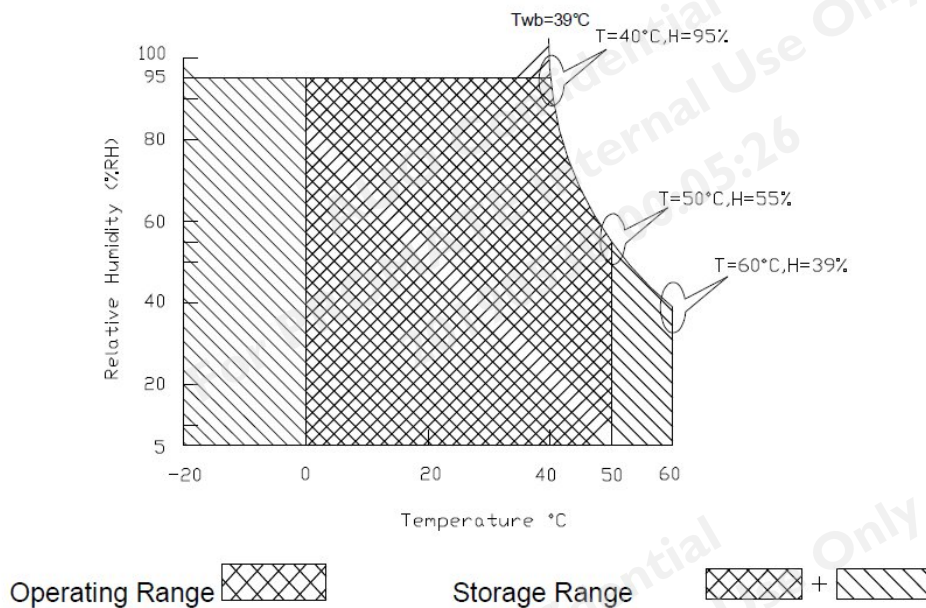

5. Electrical Characteristics



5.1 TFT LCD Module

5.1.1 Power Specification

Input power specifications are shown as follows:

Symbol	Parameter	Min	Typ	Max	Units	Remark
VDD	Logic/LCD Drive Voltage	4.5	5	5.5	[Volt]	±10%
IDD	VDD Current	-	1.2	1.32	[A]	Vin=5V, White Pattern, at 60Hz
Irush	LCD Inrush Current	-	-	5	[A]	Note 1
PDD	VDD Power	-	6	6.75	[Watt]	Vin=5V, White Pattern, at 60Hz
VDDrp	Allowable Logic/LCD Drive Ripple Voltage	-	-	500	[mV] p-p	With panel loading

Note 1: Measurement condition:

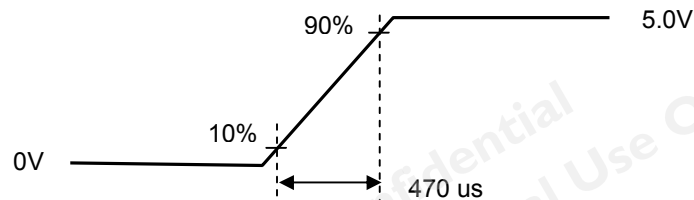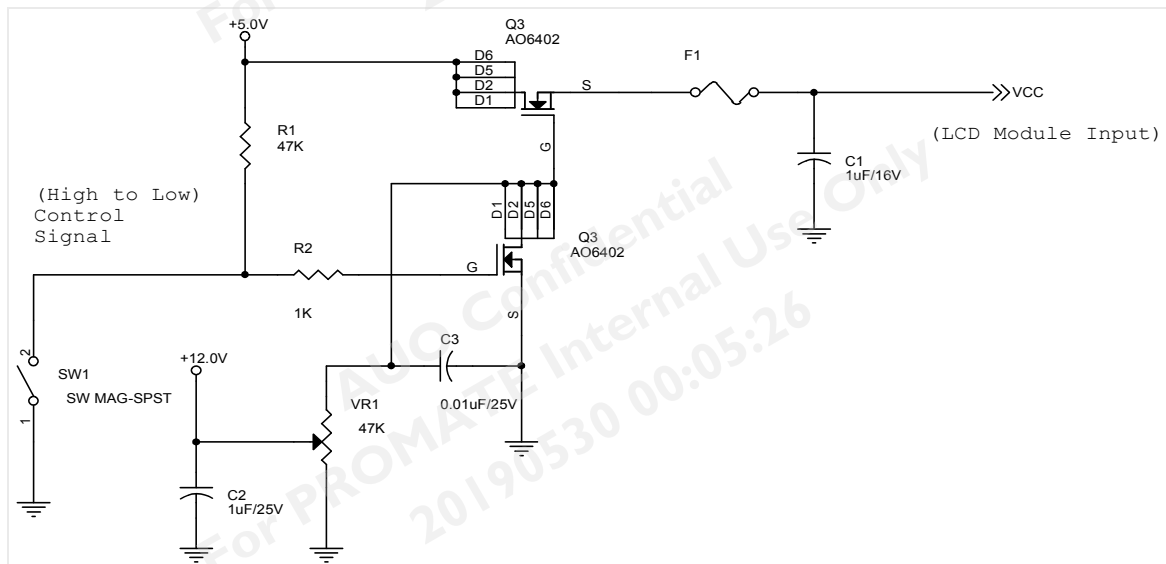


VDD rising time

5.1.2 LVDS DC Signal Electrical Characteristics

Input signals shall be low or Hi-Z state when VDD is off.

Symbol	Item	Min.	Typ.	Max.	Unit	Remark
V _{TH}	Differential Input High Threshold	-	-	+100	[mV]	V _{CM} =1.2V
V _{TL}	Differential Input Low Threshold	-100	-	-	[mV]	V _{CM} =1.2V
VID	Input Differential Voltage	100	-	600	[mV]	
V _{ICM}	Differential Input Common Mode Voltage	+1.0	+1.2	+1.5	[V]	V _{TH} /V _{TL} =+/-200mV

Note: LVDS Signal Waveform.

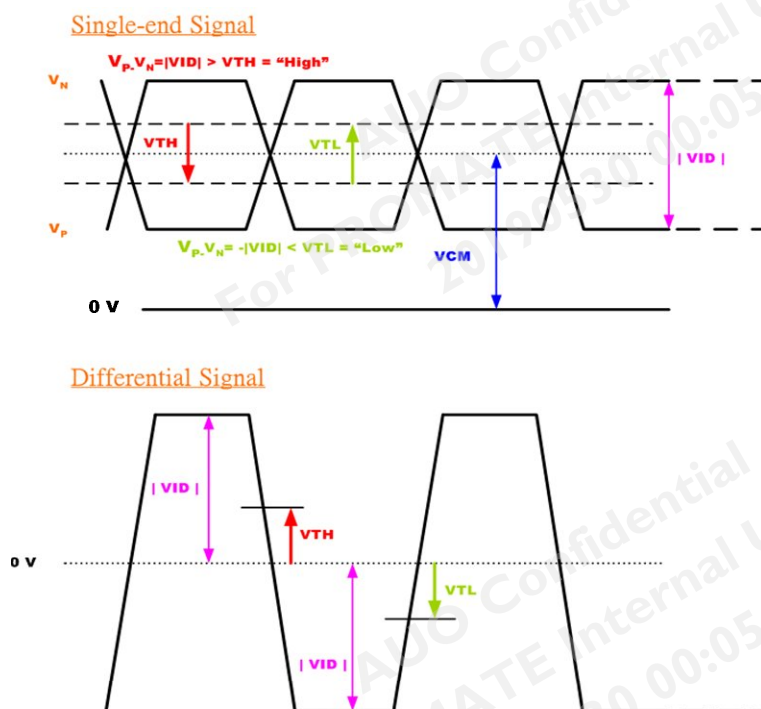

Note: AC Characteristics

Symbol	Description	Min	Max	Unit	Remark
F _{DEV}	Maximum deviation of input clock frequency during Spread Spectrum	-	± 3	%	
F _{MOD}	Maximum modulation frequency of input clock during Spread Spectrum	-	200	KHz	




Product Specification

AU OPTRONICS CORPORATION

G270QAN02.0

Note: Fclk- LVDS Clock Frequency.

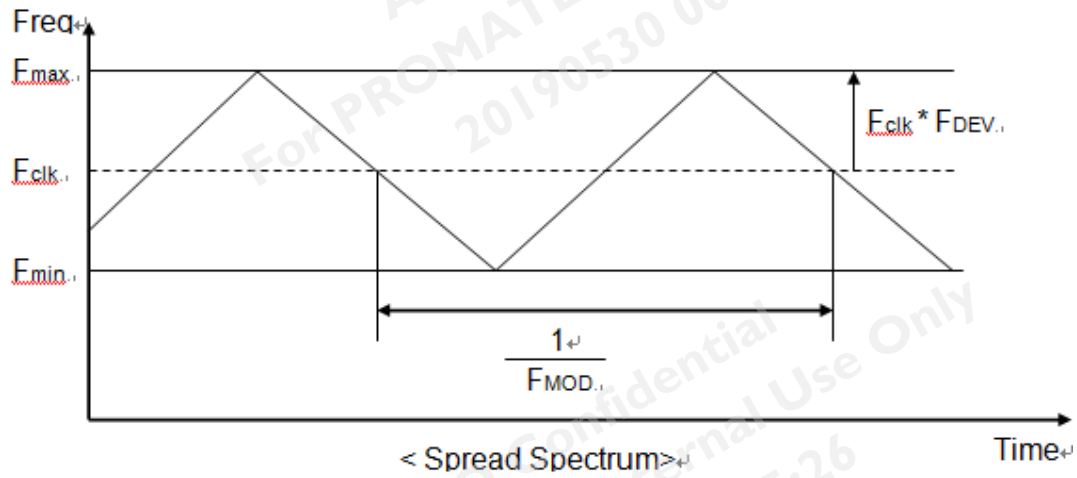


5.2 Backlight Unit

5.2.1 LED Backlight Unit


Connector Name / Designation	Lamp Connector
Manufacturer	ENTERY
Backlight connector	3709K-Q06C-04L 6PIN
Mating connector	H112K-D06N-31,33B

5.2.2 Pin Assignment

Pin #	Symbol	Description
1	Ch1	IRLED (current out)
2	Ch2	IRLED (current out)
3	V _{SLED}	VLED (voltage in))
4	V _{SLED}	VLED (voltage in)
5	Ch3	IRLED (current out)
6	Ch4	IRLED (current out)

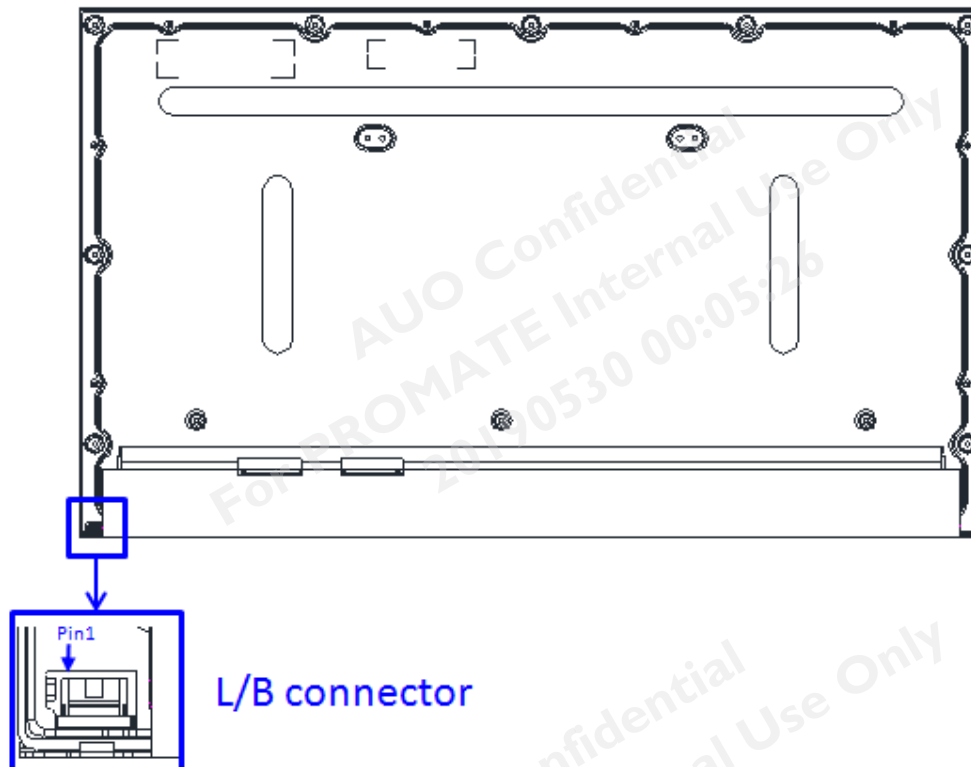

The following shows the block diagram of 27 inch Backlight Unit.

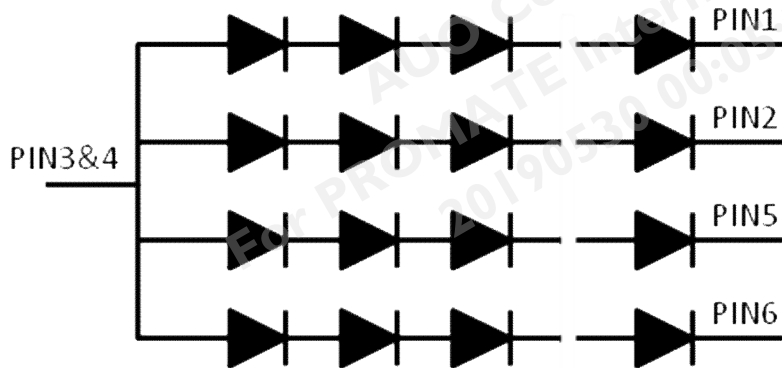

5.2.3 Parameter guideline for LED

Following characteristics are measured under a stable condition using an inverter at 25°C (Room Temperature):

LED characteristics

Symbol	Parameter	Min.	Typ.	Max.	Unit	Remark
I_L	LED Supply Current	-	82	90	[mA]	Ta = 25°C, Note 2
V_L	LED Supply Voltage	-	47.09	48.79	[Volt]	I _F = 82mA, Ta = 25°C Note 2/3
P_{LED}	LED Power Consumption	-	15.4	16	[Watt]	I _F = 82mA, Ta = 25°C Note 3/4/5
L_L	LED Life Time	30,000	-	-	Hrs	I _F =82mA, Ta = 25°C, Note 6, Note 7

Note 1: Ta means ambient temperature of TFT-LCD module.

Note 2: I_L , V_L are defined for one channel LED. There are 4 LED channel in back light unit.

Note 3: LED backlight is 68 LEDs (4 strings, 17pcs for each string)

Note 4: The LED supply power is for 4 string of LED

Note 5: The voltage capacity of LED driver IC must be over max. of LED Voltage.


Note 6: Definition of life time: Brightness becomes to 50% of its original value.

Note 7: If G270QAN02.0 module is driven by high current or at high ambient temperature & humidity condition. The operating life will reduce.

6. Signal Characteristic

6.1 Pixel Format Image

Following figure shows the relationship between the input signals and LCD pixel format.

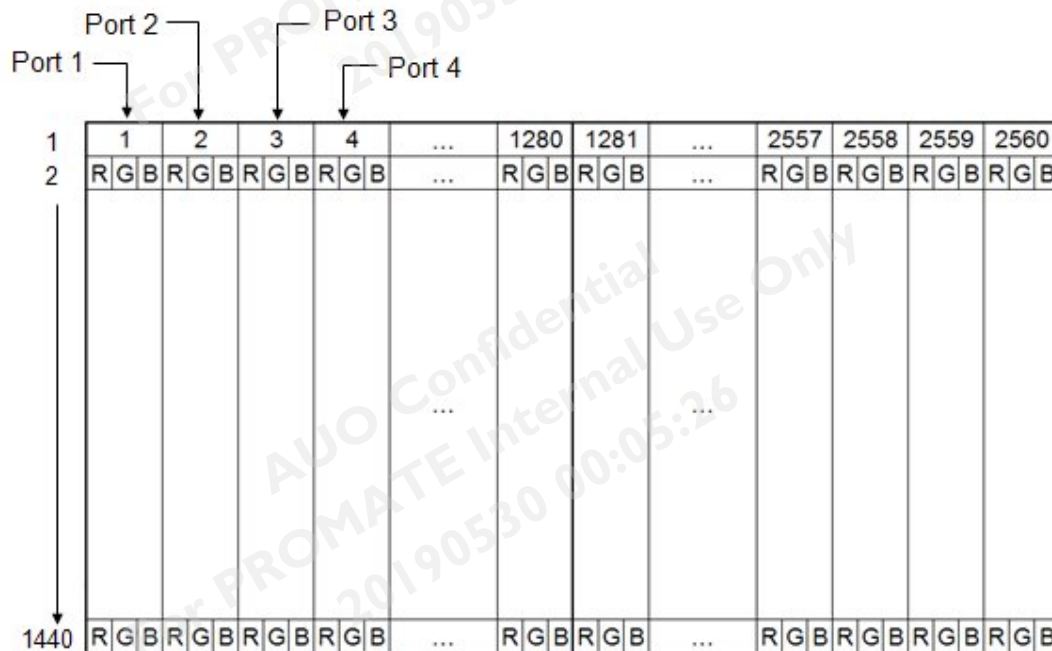

Note 1: The module use 4port-LVDS interface.

Port 1 : $4N+1$ (1, 5.. 2557 pixel)

Port 2 : $4N+2$ (2, 6.. 2558 pixel)


Port 3 : $4N+3$ (3, 7.. 2559 pixel)

Port 4 : $4N+4$ (4, 8.. 2560 pixel)

$N = 0, 1 \sim 639$



6.2 LVDS Data Format

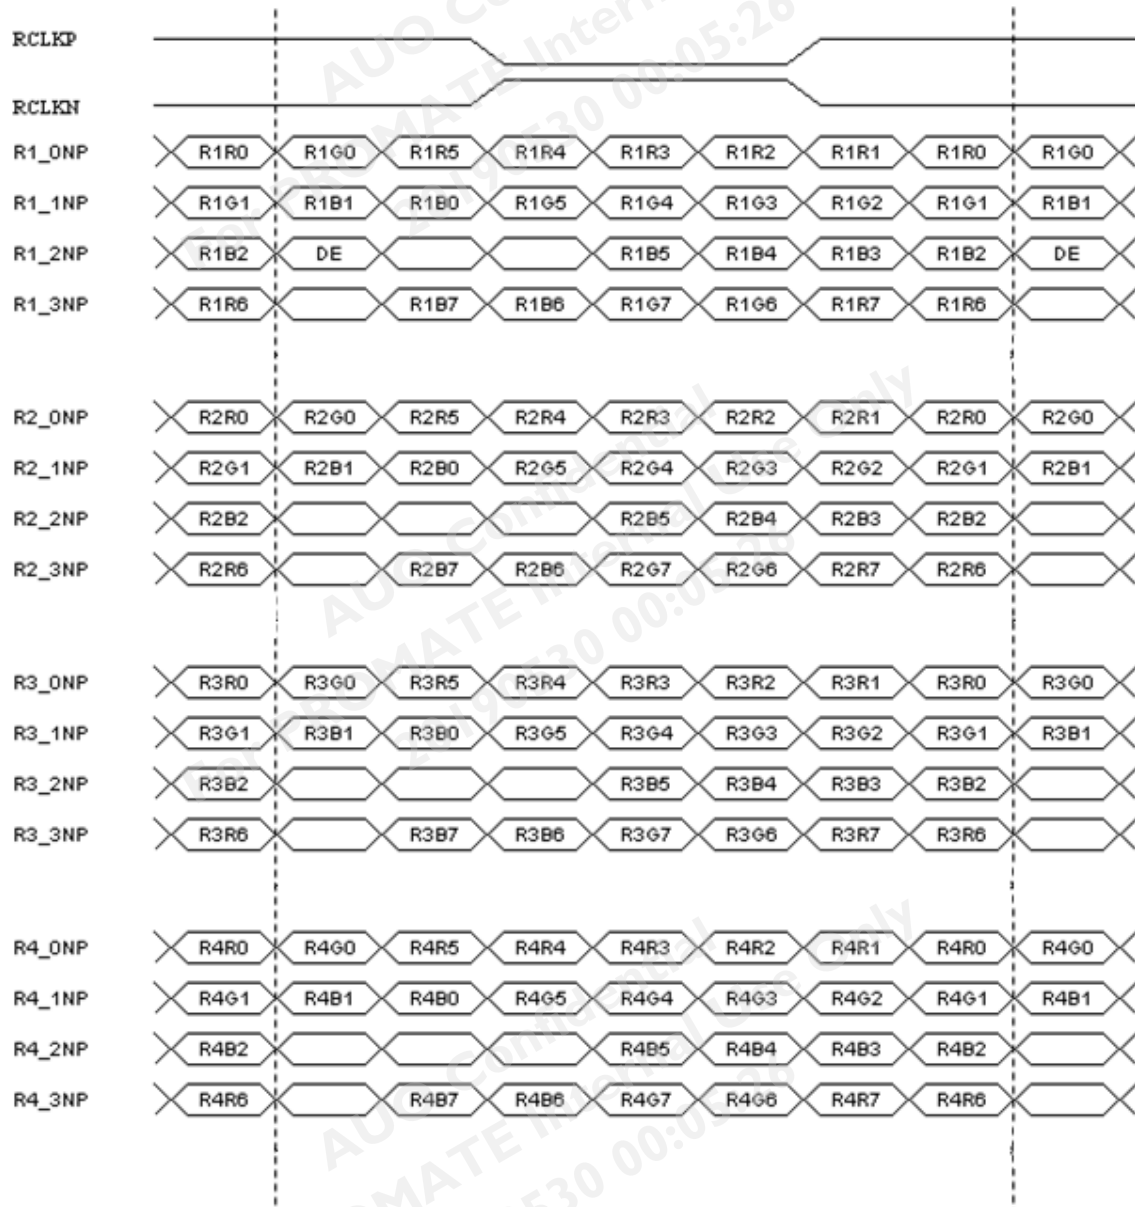



6.3 Signal Description

6.3.1 TFT LCD Module: LVDS Connector

TFT-LCD Connector (CNT1)	Manufacturer	Starconn	P-TWO
	Part Number	093G30-02001A-M4	AL230F-A0G1D-P
TFT-LCD Connector (CNT2)	Manufacturer	Starconn	
	Part Number	115F40-R000RA-M3	
Mating Connector (CNT1)	Manufacturer	JAE	STM
	Part Number	JAE_FI-X30HL	STM_PK2407P30V
Mating Connector (CNT2)	Manufacturer	Starconn	
	Part Number	115H40-0000TA-00-R	

6.3.2 Connector Pin Assignment

■ LVDS CN1

PIN #	Symbol	Description	Remark
1	R1_ON	FIRST_ Negative LVDS differential data input	
2	R1_OP	FIRST_ Positive LVDS differential data input	
3	R1_1N	FIRST_ Negative LVDS differential data input	
4	R1_1P	FIRST_ Positive LVDS differential data input	
5	R1_2N	FIRST_ Negative LVDS differential data input	
6	R1_2P	FIRST_ Positive LVDS differential data input	
7	GND	Power Ground	
8	R1_CLKN	FIRST_ Negative LVDS differential clock input	
9	R1_CLKP	FIRST_ Positive LVDS differential clock input	
10	GND	Power Ground	
11	R1_3N	FIRST_ Negative LVDS differential data input	
12	R1_3P	FIRST_ Positive LVDS differential data input	
13	NC	No connection (for AUO test only. Do not connect)	
14	NC	No connection (for AUO test only. Do not connect)	
15	GND	Power Ground	
16	R2_ON	SECOND_ Negative LVDS differential data input	
17	R2_OP	SECOND_ Positive LVDS differential data input	
18	R2_1N	SECOND_ Negative LVDS differential data input	
19	R2_1P	SECOND_ Positive LVDS differential data input	



20	R2_2N	SECOND_ Negative LVDS differential data input	
21	R2_2P	SECOND_ Positive LVDS differential data input	
22	GND	Power Ground	
23	R2_CLKN	SECOND_ Negative LVDS differential clock input	
24	R2_CLKP	SECOND_ Positive LVDS differential clock input	
25	GND	Power Ground	
26	R2_3N	SECOND_ Negative LVDS differential data input	
27	R2_3P	SECOND_ Positive LVDS differential data input	
28	NC	No connection (for AUO test only. Do not connect)	
29	NC	No connection (for AUO test only. Do not connect)	
30	NC	No connection (for AUO test only. Do not connect)	

■ LVDS CN2

PIN #	Symbol	Description	Remark
1	R3_ON	THIRD_ Negative LVDS differential data input	
2	R3_OP	THIRD_ Positive LVDS differential data input	
3	R3_1N	THIRD_ Negative LVDS differential data input	
4	R3_1P	THIRD_ Positive LVDS differential data input	
5	R3_2N	THIRD_ Negative LVDS differential data input	
6	R3_2P	THIRD_ Positive LVDS differential data input	
7	GND	Power Ground	
8	R3_CLKN	THIRD_ Negative LVDS differential clock input	
9	R3_CLKP	THIRD_ Positive LVDS differential clock input	
10	GND	Power Ground	
11	R3_3N	THIRD_ Negative LVDS differential data input	
12	R3_3P	THIRD_ Positive LVDS differential data input	
13	NC	No connection (for AUO test only. Do not connect)	
14	NC	No connection (for AUO test only. Do not connect)	
15	GND	Power Ground	
16	R4_ON	FOURTH_ Negative LVDS differential data input	
17	R4_OP	FOURTH_ Positive LVDS differential data input	
18	R4_1N	FOURTH_ Negative LVDS differential data input	
19	R4_1P	FOURTH_ Positive LVDS differential data input	



Product Specification

G270QAN02.0

AU OPTRONICS CORPORATION

20	R4_2N	FOURTH_ Negative LVDS differential data input	
21	R4_2P	FOURTH_ Positive LVDS differential data input	
22	GND	Power Ground	
23	R4_CLKN	FOURTH_ Negative LVDS differential clock input	
24	R4_CLKP	FOURTH_ Positive LVDS differential clock input	
25	GND	Power Ground	
26	R4_3N	FOURTH_ Negative LVDS differential data input	
27	R4_3P	FOURTH_ Positive LVDS differential data input	
28	NC	No connection (for AUO test only. Do not connect)	
29	NC	No connection (for AUO test only. Do not connect)	
30	NC	No connection (for AUO test only. Do not connect)	
31	NC	No connection (for AUO test only. Do not connect)	
32	NC	No connection (for AUO test only. Do not connect)	
33	GND	Power Ground	
34	GND	Power Ground	
35	GND	Power Ground	
36	VDD	Power +5V	
37	VDD	Power +5V	
38	VDD	Power +5V	
39	VDD	Power +5V	
40	VDD	Power +5V	

6.4 Interface Timing

6.4.1 Timing Characteristics

It only support DE mode and the input timing are shown as the following table.

Symbol	Description		Min.	Typ.	Max.	Unit	Remark
Tv	Vertical Section	Period	1452	1481	2299	Th	
Tdisp (v)		Active	1440	1440	1440	Th	
Tblk (v)		Blanking	12	41	859	Th	
Fv		Frequency	49	60	76	Hz	
Th	Horizontal Section	Period	679	680	1023	Tclk	
Tdisp (h)		Active	640	640	640	Tclk	
Tblk (h)		Blanking	39	40	383	Tclk	
Fh		Frequency	71.3	88.8	112.6	KHz	Note 3-3
Tclk	LVDS Clock	Period	13.1	16.6	20.6	ns	1/Fclk
Fclk		Frequency	48.4	60.4	76.5	MHz	Note 3-4

Note 3-3: The equation is listed as following. Please don't exceed the above recommended value.

$$Fh (\text{Min.}) = Fclk (\text{Min.}) / Th (\text{Min.});$$

$$Fh (\text{Typ.}) = Fclk (\text{Typ.}) / Th (\text{Typ.});$$

$$Fh (\text{Max.}) = Fclk (\text{Max.}) / Th (\text{Min.});$$


Note 3-4: The equation is listed as following. Please don't exceed the above recommended value.

$$Fclk (\text{Min.}) = Fv (\text{Min.}) \times Th (\text{Min.}) \times Tv (\text{Min.});$$

$$Fclk (\text{Typ.}) = Fv (\text{Typ.}) \times Th (\text{Typ.}) \times Tv (\text{Typ.});$$


$$Fclk (\text{Max.}) = Fv (\text{Max.}) \times Th (\text{Typ.}) \times Tv (\text{Typ.});$$

6.4.2 Input Timing Diagram

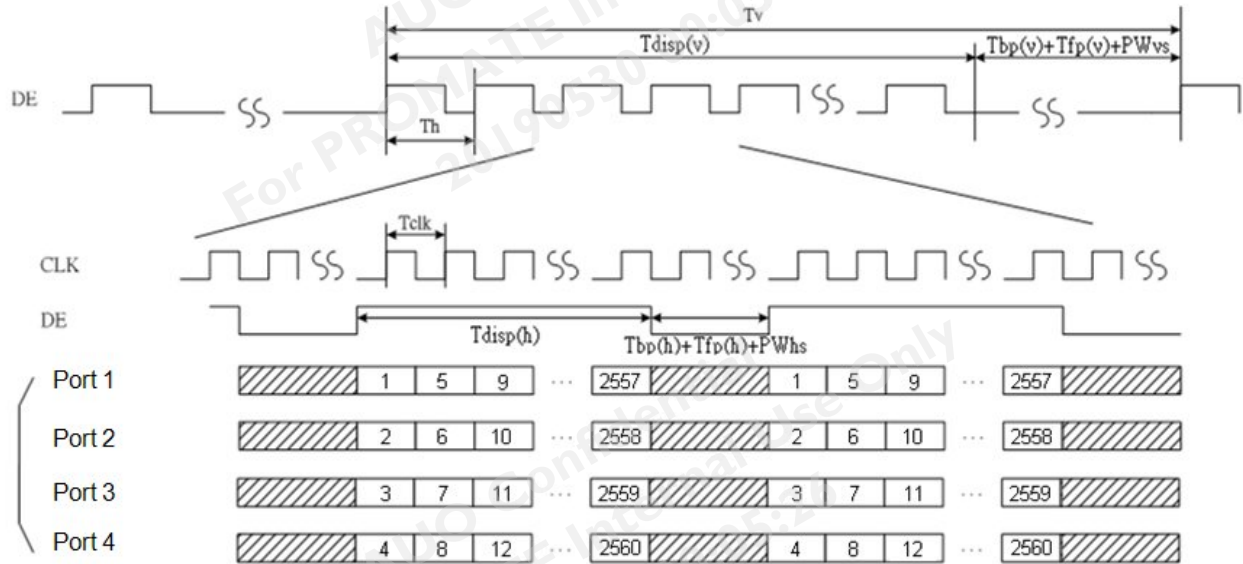

6.5 Power ON/OFF Sequence

VDD power, LVDS signal and backlight on/off sequence are as following. LVDS signals from any system shall be Hi-Z state when VDD is off.

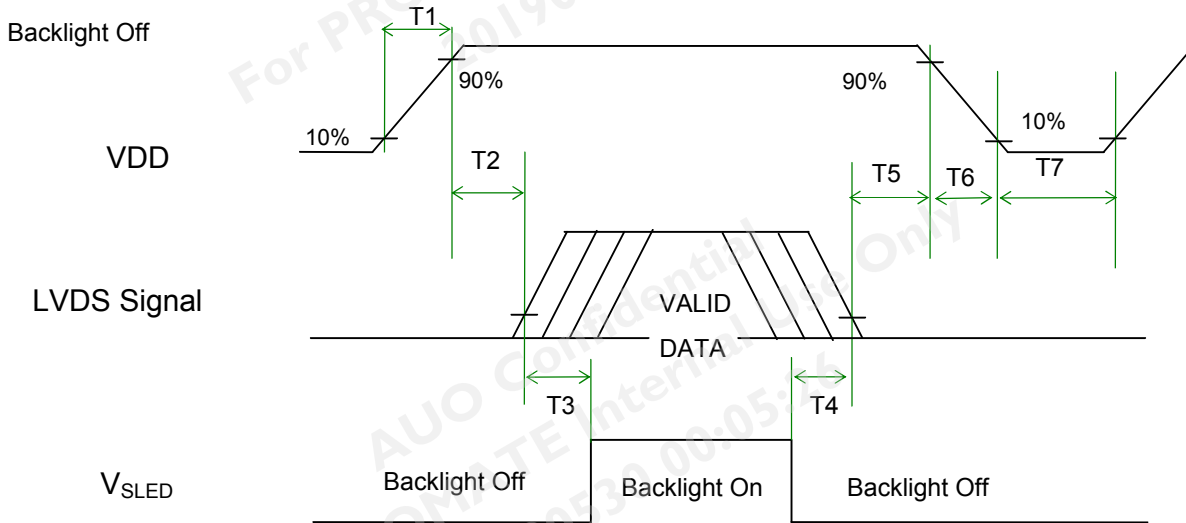

Power Sequence Timing

Symbol	Value			Unit	Remark
	Min.	Typ.	Max.		
T1	0.5	-	10	[ms]	
T2	0	-	50	[ms]	
T3	500	-	-	[ms]	
T4	100	-	-	[ms]	
T5	0	-	50	[ms]	Note 3-5
T6	0	-	200	[ms]	Note 3-6
T7	1000	-	-	[ms]	

Note 3-5 : Recommend setting T5 = 0ms to avoid electronic noise when VDD is off.

Note 3-6: Voltage of VDO must decay smoothly after power-off. (Customer system decide this value)

7. Reliability Test Criteria

Items	Required Condition	Note
Temperature Humidity Bias (THB)	Ta= 50°C, 80%RH, 300hours	
High Temperature Operation (HTO)	Ta= 50°C, 300hours	
Low Temperature Operation (LTO)	Ta= 0°C, 300hours	
High Temperature Storage (HTS)	Ta= 60°C, 300hours	
Low Temperature Storage (LTS)	Ta= -20°C, 300hours	
Vibration Test (Non-operation)	Acceleration: 1.5 Grms Wave: Random Frequency: 10 - 200 Hz Sweep: 30 Minutes each Axis (X, Y, Z)	
Shock Test (Non-operation)	Acceleration: 50 G Wave: Half-sine Active Time: 20 ms Direction: ±X, ±Y, ±Z (one time for each Axis)	
Drop Test	Height: 60 cm, package test	
Thermal Shock Test (TST)	-20°C /30min, 60/°C 30min, 100 cycles	1
On/Off Test	On/10sec, Off/10sec, 30,000 cycles	
ESD (Electrostatic Discharge)	Contact Discharge: ± 8KV, 150pF(330Ω) 1sec, 9 points, 25 times/ point.	2
	Air Discharge: ± 15KV, 150pF(330Ω) 1sec 9 points, 25 times/ point.	
Altitude Test	Operation:10,000 ft Non-Operation:30,000 ft	

Note 1: The TFT-LCD module will not sustain damage after being subjected to 100 cycles of rapid temperature change. A cycle of rapid temperature change consists of varying the temperature from -20°C to 50°C, and back again. Power is not applied during the test. After temperature cycling, the unit is placed in normal room ambient for at least 4 hours before power on.


Note 2: According to EN61000-4-2 , ESD class B: Some performance degradation allowed. No data lost. Self-recoverable. No hardware failures.

Note 3:

- Water condensation is not allowed for each test items.
- Each test is done by new TFT-LCD module. Don't use the same TFT-LCD module repeatedly for reliability test.
- The reliability test is performed only to examine the TFT-LCD module capability.
- To inspect TFT-LCD module after reliability test, please store it at room temperature and room humidity for 24 hours at least in advance.
- No function failure occurs.

8. Mechanical Characteristics

8.1 LCM Outline Dimension

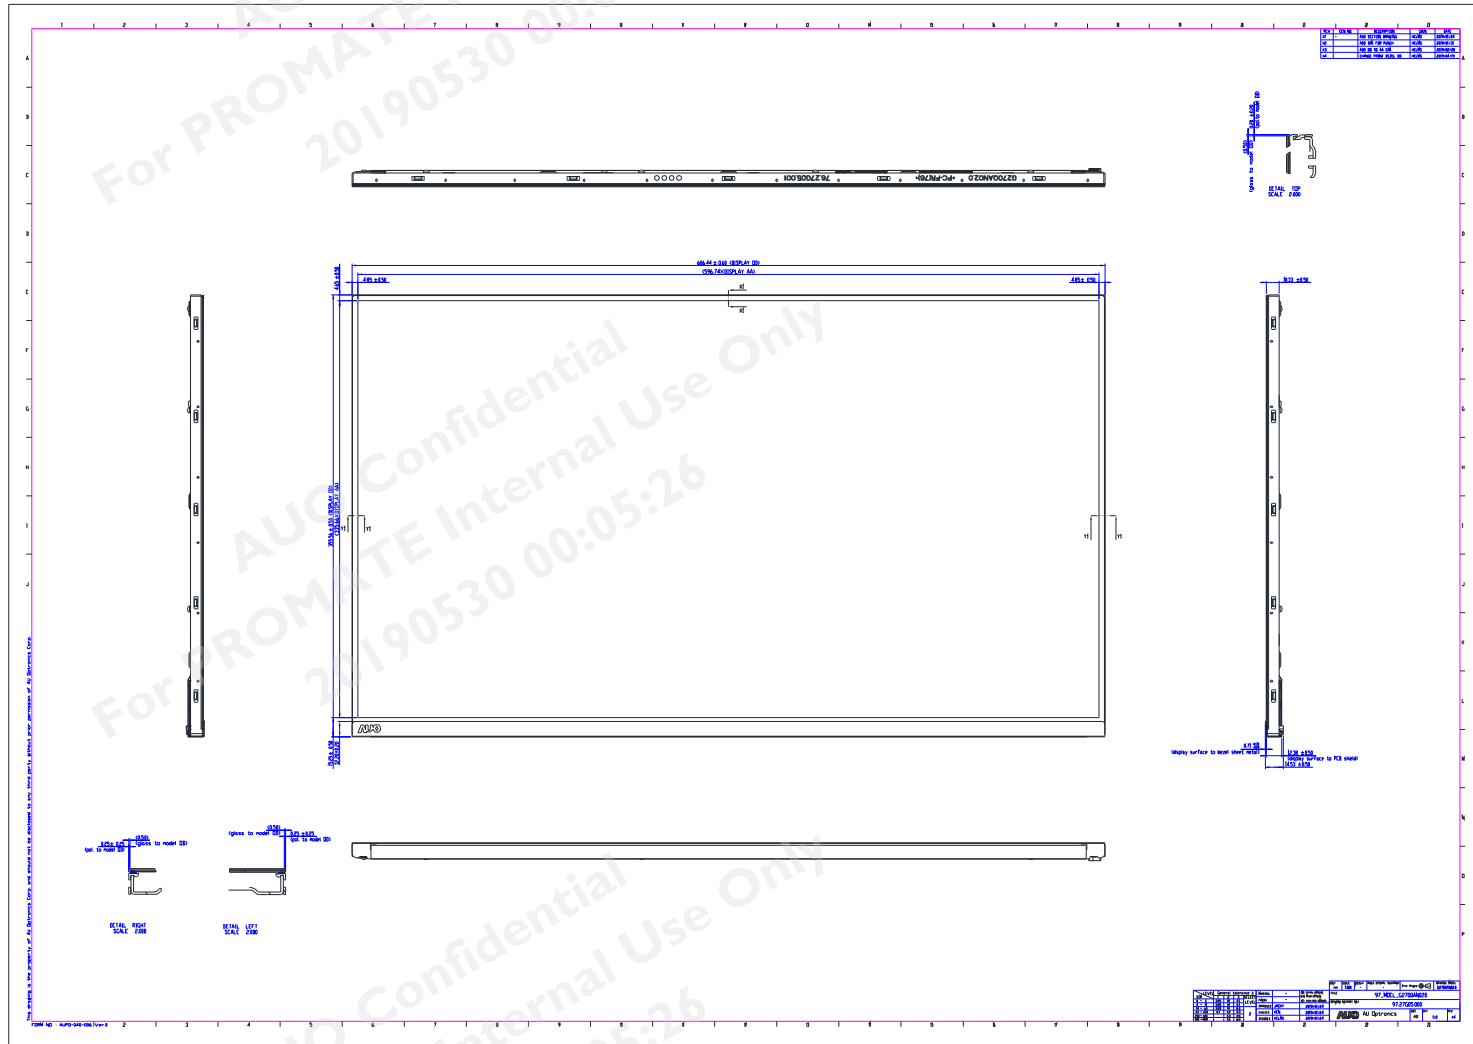



Technical drawing of a rectangular enclosure with dimensions and callouts. The drawing includes a main plan view and three detail views (DETAIL A, DETAIL B, DETAIL C) showing cross-sections of the enclosure walls. Dimensions are provided in inches and millimeters. A table in the top right corner lists dimensions and their corresponding values. A table in the bottom right corner lists dimensions and their corresponding values. A table in the bottom right corner lists dimensions and their corresponding values.


Dim	Value	Unit
1	10.00	IN
2	10.00	IN
3	10.00	IN
4	10.00	IN
5	10.00	IN
6	10.00	IN
7	10.00	IN
8	10.00	IN
9	10.00	IN
10	10.00	IN
11	10.00	IN
12	10.00	IN
13	10.00	IN
14	10.00	IN
15	10.00	IN
16	10.00	IN
17	10.00	IN
18	10.00	IN
19	10.00	IN
20	10.00	IN
21	10.00	IN
22	10.00	IN
23	10.00	IN
24	10.00	IN
25	10.00	IN
26	10.00	IN
27	10.00	IN
28	10.00	IN
29	10.00	IN
30	10.00	IN
31	10.00	IN
32	10.00	IN
33	10.00	IN
34	10.00	IN
35	10.00	IN
36	10.00	IN
37	10.00	IN
38	10.00	IN
39	10.00	IN
40	10.00	IN
41	10.00	IN
42	10.00	IN
43	10.00	IN
44	10.00	IN
45	10.00	IN
46	10.00	IN
47	10.00	IN
48	10.00	IN
49	10.00	IN
50	10.00	IN
51	10.00	IN
52	10.00	IN
53	10.00	IN
54	10.00	IN
55	10.00	IN
56	10.00	IN
57	10.00	IN
58	10.00	IN
59	10.00	IN
60	10.00	IN
61	10.00	IN
62	10.00	IN
63	10.00	IN
64	10.00	IN
65	10.00	IN
66	10.00	IN
67	10.00	IN
68	10.00	IN
69	10.00	IN
70	10.00	IN
71	10.00	IN
72	10.00	IN
73	10.00	IN
74	10.00	IN
75	10.00	IN
76	10.00	IN
77	10.00	IN
78	10.00	IN
79	10.00	IN
80	10.00	IN
81	10.00	IN
82	10.00	IN
83	10.00	IN
84	10.00	IN
85	10.00	IN
86	10.00	IN
87	10.00	IN
88	10.00	IN
89	10.00	IN
90	10.00	IN
91	10.00	IN
92	10.00	IN
93	10.00	IN
94	10.00	IN
95	10.00	IN
96	10.00	IN
97	10.00	IN
98	10.00	IN
99	10.00	IN
100	10.00	IN

Dim	Value	Unit
1	10.00	IN
2	10.00	IN
3	10.00	IN
4	10.00	IN
5	10.00	IN
6	10.00	IN
7	10.00	IN
8	10.00	IN
9	10.00	IN
10	10.00	IN
11	10.00	IN
12	10.00	IN
13	10.00	IN
14	10.00	IN
15	10.00	IN

For PROMATE internal use only - provided by jackctyang on 2019/05/30

9. Label and Packaging

9.1 Shipping Label (on the rear side of TFT-LCD display)

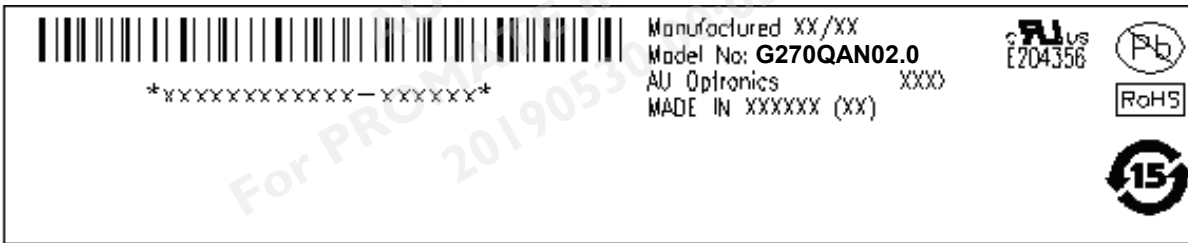


Note 1: For Pb Free products, AUO will add  for identification.

Note 2: For RoHS compatible products, AUO will add  for identification.

Note 3: For China RoHS compatible products, AUO will add  for identification.

Note 4: The Green Mark will be presented only when the green documents have been ready by AUO Internal Green Team.

9.2 Carton Package

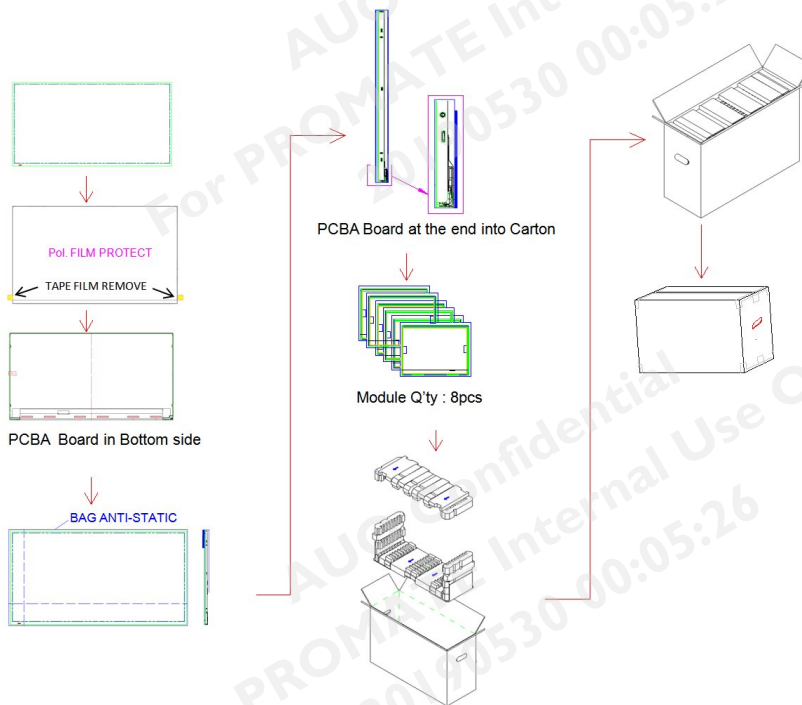

Max capacity : 8 PCS TFT-LCD module per carton

Max weight : 28.6 kg per carton

Outside dimension of carton : 702mm(L)* 264mm(W)*456mm(H)

Pallet size : 1070 mm * 740 mm * 132mm

Box stacked

Module by air_Max : (1 *4) *2 layers , one pallet put 8 boxes , total 64pcs module

Module by sea_Max : (1*4) *2 layers + (1 *4) *2 layers , two pallet put 16 boxes , total 128pcs module

Module by sea_HQ_Max : (1*4) *2 layers+(1*4) *2 layers, two pallet put 16 boxes, total 128pcs module



10 Safety

10.1 Sharp Edge Requirements

There will be no sharp edges or comers on the display assembly that could cause injury.

10.2 Materials

10.2.1 Toxicity

There will be no carcinogenic materials used anywhere in the display module. If toxic materials are used, they will be reviewed and approved by the responsible AUO toxicologist.

10.2.2 Flammability

All components including electrical components that do not meet the flammability grade UL94-V1 in the module will complete the flammability rating exception approval process.

The printed circuit board will be made from material rated 94-V1 or better. The actual UL flammability rating will be printed on the printed circuit board.

10.3 Capacitors

If any polarized capacitors are used in the display assembly, provisions will be made to keep them from being inserted backwards.

10.4 National Test Lab Requirement

The display module will satisfy all requirements for compliance to:
UL 60950-1 second edition U.S.A. Information Technology Equipment